Type: DA55-NPxx/AxxW

BCD/hex/24V active high

front view

DA55-NP40/AxxRWD

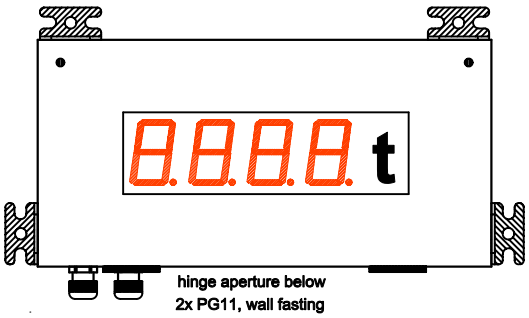

side view



controls inside case

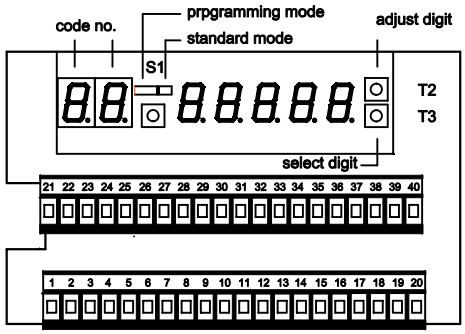

programming instructions

(select digit with key T3, adjust digit with key T2)

code no.			input code	data inputs															
00	display 00000			A	L	H	L	H	L	H	L	H	L	H	L	H	L	H	L	H
	parallel	multiplex		B	L	L	H	H	L	L	H	H	L	L	H	H	L	L	H	H
				C	L	L	L	L	H	H	H	H	L	L	L	L	H	H	H	H
				D	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H
BCD	___11	___01	display		0	1	2	3	4	5	6	7	8	9						
	___12	___02	display 1.digit		0	1	2	3	4	5	6	7	8	9						
						1	-													
Hex	___13	___03	display		0	1	2	3	4	5	6	7	8	9	A	b	C	d	E	F
	___14	___04	display 1.digit		0	1	2	3	4	5	6	7	8	9	A	b	C	d	E	F
						1	-													

rear connector with screw-type terminals

DA55-NPxx/A1



DC
aux. supply
electr. isolated

DA55-NPxx/A2

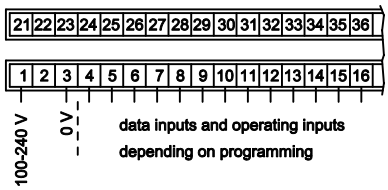

AC/DC
aux. supply
electr. isolated

terminal inputs

(KZ = code no.)

KZ	display	terminal																																						
00	___00	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
BCD	multiplex 01 02	aux. supply			Gnd	ST	A	B	C	D	DT	LE	DP	DT	LE	DP	DT	LE	DP	DT	LE	DP	DT	LE	DP																
Hex	multiplex 03 04				BCD						10^0			10^1			10^2			10^3			10^4																		
BCD	parallel 11 12	aux. supply			Gnd	A	B	C	D	DT	LE	DP	A	B	C	D	DT	LE	DP	A	B	C	D	DT	LE	DP	A	B	C	D	DT	LE	DP	A	B	C	D	DT	LE	DP	A	B	C	D	DT	LE	DP
Hex	parallel 13 14				BCD 10^0									BCD 10^1						BCD 10^2						BCD 10^3								BCD 10^4											

operating inputs: active high (independent form BCD-inputs)

ST	lamp-test:	all segments and decimal points displayed
DT	blanking input:	display blank
DP	decimal point:	decimal point displayed
LE	Latch Enable:	latch enable
	after a change of the LE-signal from L to H the display stores	
	the information received before the LE-signal changed.	

operating inputs	(X = H or L)		
DT	H	L	X
LE	X	H	X
ST	L	L	H
data	X	X	X
display	blank	latch	test

technical data:

aux. supply:	DA55-NPxx/A1...	18 - 35 V DC
	DA55-NPxx/A2...	100 - 240 V AC/DC
power consumption:	max. 12VA	
temperature range:	-20 °C . . . +65 °C	
data / operating inputs:	24V active high	
	max. 35V L < 7V, H > 10V min. 2ms	
input resistance:	15 kOhm	
display height/colour:	LED 57 mm / red or green	

case dimensions

DA55	Sheet steel powder coated RAL 7032		outside dimension (mm)		
DA55-NP __ /xxxxW	DA55-NP __ /xxxxW D	DA55-NP __ /xxxxW D1	width	xheight	x depth
30 888			300	200	80
40 8888	30 888°C				
50 88888	40 8888°C	30 888km/h	400		
	50 88888°C	40 8888km/h			
		50 88888km/h	500		

DA55 – NP__ / _ _ _ W __

dimension:	D = max. 2 signs	D1 = max. 4 signs		
LED colour:	R = Red	G = Green		
aux.supply:	1 = 24V DC	2 = 230V AC		
BCD-input:	A = active high 24V			
digits:	30 = 3 digits	40 = 4 digits	50 = 5 digits	60= 6 digits

GS Gebhardt & Schäfer Industrie-Elektronik GmbH

Porschestrasse 11
D-51381 Leverkusen
Tel. +49 (0) 21 71 / 73 72 2 -0
Fax +49 (0) 21 71 / 73 72 2 -39
Internet: http://www.GS-GmbH.de
E-Mail: info@GS-GmbH.de

Kölner Bank eG
IBAN: DE62 3716 0087 0940 9250 10
BIC: GENODED1CGN
Kreissparkasse Köln
IBAN: DE65 3705 0299 0312 0061 45
BIC: COKSDE33

Deutsche Bank AG
IBAN: DE30 3757 0024 0851 0851 00
BIC: DEUTDEDB375
Foreign Payments:
Account-No. 851 085 1
S.W.I.F.T. DEUTDEDB 375

Geschäftsführer:
Karlheinz Schäfer
Guido Gebhardt
USt.-Nr. DE 123713297
Amtsgericht Köln, HRB 48860
D-U-N-S®: 340802073