
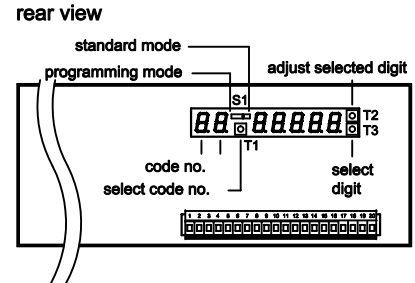
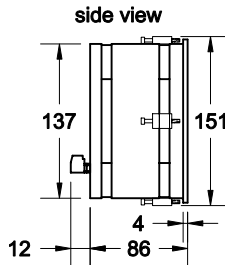


**Type:** **DA75-NZxx/AxxE**  
**Counter/Totalizer**  
**add/subtract**

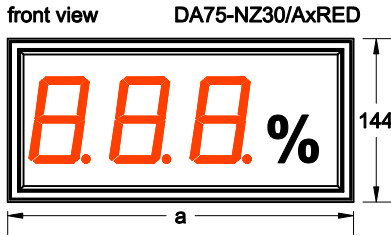


case dimensions

DA75	aluminium case powder coated black		front	panel
	shell-depth (with terminal) 86 (98) mm		frame	cutout
DA75-NZ __ /xxx E	DA75-NZ __ /xxx E D	DA75-NZ __ /xxx E D1	width [a]	b x h
30			288	282 x 138
40	30		336	330 x 138
50	40	30	432	426 x 138
	50	40	480	474 x 138
		50	576	570 x 138

programming mode

code no.	display	description
00	0.0.0.0	decimal point 0 = none 2 = 0,00 1 = 0,0 3 = 0,000
	0.0.0.0	pulse-edge 0 = falls edge ≤ 1 kHz 1 = ascends edge ≤ 1 kHz 2 = falls edge ≤ 10 Hz relay 3 = ascends edge ≤ 10 Hz relay
01	0.0.0.0	preset Z1
02	0.0.0.0	preset Z2
03	0.0.0.0	set reset value Z1
04	0.0.0.0	set reset value Z2
05	0.0.0.0	prescaler counter Z1 (qty. pulses/1 display step)
06	0.0.0.0	prescaler counter Z2 (qty. pulses/1 display step)
07	0.0.0.0	prescaler display Z1 (qty. display steps/1 pulse)
08	0.0.0.0	prescaler display Z2 (qty. display steps/1 pulse)
09	0.0.0.0	brightness adjustment (0 ... 9) 0 = bright 9 = dark


rear connector with screw-type terminals

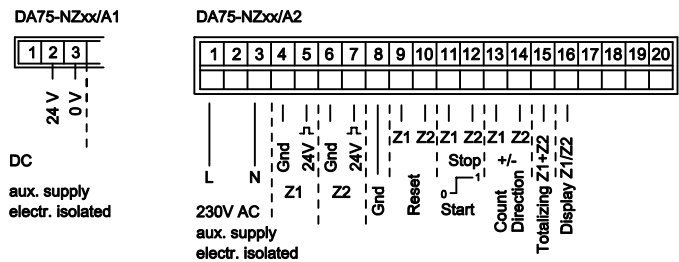

technical data

aux. supply:	DA75-NZxx/A1...	18-35 V DC
	DA75-NZxx/A2...	100-240 V AC
power consumption:	max. 15 VA	
temperature range:	-25 °C ... +65 °C	
Vorwahlpreset:	programmable	
count inputs:	24V active high add/subtract	
	L < 7V, H > 15V max. 35V	
operating inputs:	24V active high L < 7V, H > 15V max. 35V	
reset:	24V active high reset value programmable	
stop:	24V active high	
start:	24V active low (< 7V: counter starts with pulse)	

count direction (inputs 13+14):	L = add H = subtract
totalizing (input 15):	H = summary of counters Z1+Z2 is displayed
display changeover (input 16):	L = display totalizer Z1 H = display totalizer Z2
data retention of totalizer Z1 and Z2	
input resistance:	15 kOhm
counting frequency:	max. 1kHz
pulse length:	min. 0,1 ms
prescaler:	programmable
display:	76 mm, LED red or green

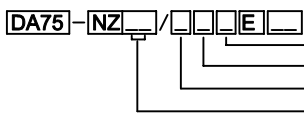

dimension:	D = max. 2 signs	D1 = max. 4 signs
display colour:	R = red	G = green
aux. supply:	1 = 24V DC	2 = 230V AC
input:	A = counter active high 24V	
digits:	30 = 3 digits	40 = 4 digits
		50 = 5 digits

**GS Gebhardt & Schäfer Industrie-Elektronik GmbH**

Porschstrasse 11  
D-51381 Leverkusen  
Tel. +49 (0) 21 71 / 73 72 2 -0  
Fax +49 (0) 21 71 / 73 72 2 -39  
Internet: <http://www.GS-GmbH.de>  
E-Mail: [info@GS-GmbH.de](mailto:info@GS-GmbH.de)

Kölner Bank eG  
IBAN: DE62 3716 0087 0940 9250 10  
BIC: GENODED1CGN  
Kreissparkasse Köln  
IBAN: DE65 3705 0299 0312 0061 45  
BIC: COKSDE33

Deutsche Bank AG  
IBAN: DE30 3757 0024 0851 0851 00  
BIC: DEUTDE33  
Foreign Payments:  
Account-No. 851 085 1  
S.W.I.F.T. DEUTDEB 375

Geschäftsführer:  
Karlheinz Schäfer  
Guido Gebhardt  
USt.-Nr. DE 123713297  
Amtsgericht Köln, HRB 48860  
D-U-N-S@: 340802073