

Type: DBA-EA23/A

DC current/voltage




case 96 x 24 mm

programming

CN = code no.

CN	display	description
0		min. display value
1		min. input signal (to be applied) take over with T3
2		max. display value
3		max. input signal (to be applied) take over with T3
4	1...500	average value of 1..500 measurements
5	2/5/10	half correction of last digit by steps of 2, 5 or 10
6	-- 0	0 = scale direction from below upward reciprocal display value for 1 = 3-digit display and scale 2 = only 3-digit display 3 = only scale
	-- 4	0 = scale(point) direction from below upward reciprocal display value for 5 = 3-digit display and scale 6 = only 3-digit display 7 = only scale
	-- 8	8 = scale direction from above downward reciprocal display value for 9 = 3-digit display and scale A = only 3-digit display b = only scale
	-- C	8 = scale(point) direction from above downward reciprocal display value for d = 3-digit display and scale E = only 3-digit display F = only scale
	- 1 -	linebreak indication with value falling 25% below measured value (4-20mA) 0 = no 1 = yes


DBA-EA23/AxxGQ




-EA23/AxxRH




controls behind front glass

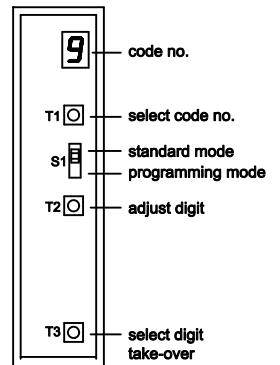

controls behind front glass

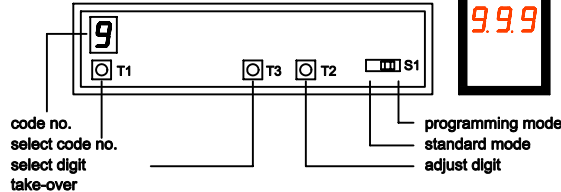

rear connector with screw-type terminals

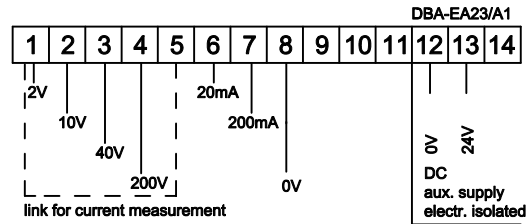


display-messages

EEP	EEProm under programming
---	overflow (flashing of display segments in the middle)
- -	line-break indication

input resistance

terminal	Ri
1	100 kOhm
2	560 kOhm
3	2,2 MOhm
4	10 MOhm
6	100 Ohm
7	10 Ohm

DBA-EA23/A2



technical data

aux. supply:	DBA-EA23/A1xxx:	18-35V DC
	DBA-EA23/A2xxx:	115/230V AC
power consumption:	max. 2,5 VA	
measuring range (V):	2V / 10V / 40V / 200V	
measuring range (mA):	20mA / 200mA	
display max.:	programmable	
display zero:	programmable	
conversion rate:	approx. 1 per second	
principle of measurement:	dual-slope-integration	
error of measurement:	+/- 0,1% of measured value, +/- 1 digit/segment	
overflow:	flashing of display segments in the middle and each 2nd bragraph segment	
average value:	adjustable from 1 to 500 measurements	

display height:	7 mm	3 digits
resolution:	-99...999	
scale length:	50 mm	20 segments
scale resolution:	1 segment	
end value of scale is according to adjusted max. display value		
panel cutout:	92(+0,8) x 22,2(+0,6) mm	
mount.depth (without connector):	114 mm (102 mm)	
bezel height:	7,5 mm	
option:	Min.-Max.-memory function	
controls are accessible through the front glass		
recall min.- and max.-value with key T2 and T3		

DBA - EA - / A - 0 - M -	addition for min./max.memory function	
mounting:	H = vertical	Q = horizontal
LED colour:	R = red	G = green
Option:	see data sheet at the end of chapter	
aux.supply:	1 = 24V DC	2 = 115/230V AC
display:	23 = 20 segments + 3-digit LED	

GS Gebhardt & Schäfer Industrie-Elektronik GmbH

Porschestraße 11
D-51381 Leverkusen
Tel. +49 (0) 21 71 / 73 72 2 -0
Fax +49 (0) 21 71 / 73 72 2 -39
Internet: <http://www.GS-GmbH.de>
E-Mail: info@GS-GmbH.de

Kölner Bank eG
IBAN: DE62 3716 0087 0940 9250 10
BIC: GENODED1CGN
Kreissparkasse Köln
IBAN: DE65 3705 0299 0312 0061 45
BIC: COKSDE33

Deutsche Bank AG
IBAN: DE30 3757 0024 0851 0851 00
BIC: DEUTDE3375
Foreign Payments:
Account-No. 851 085 1
S.W.I.F.T. DEUTDEB3 375

Geschäftsführer: 2.6
Karlheinz Schäfer
Guido Gebhardt
USt.-Nr. DE 123713297
Amtsgericht Köln, HRB 48860
D-U-N-S@: 340802073